

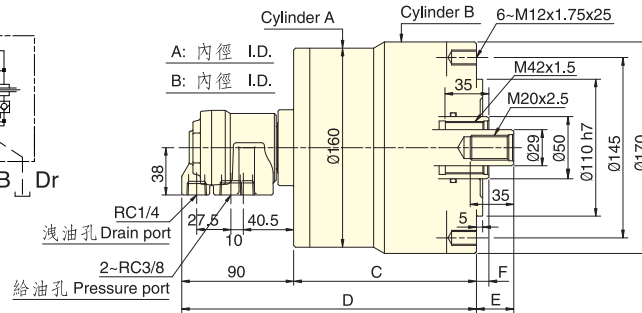


附逆止閥雙桿型迴轉油壓缸

DOUBLE ROD ROTATING CYLINDER WITH SAFETY DEVICE



- 短型，輕量，雙桿型迴轉油壓缸。
- 內建逆止閥自鎖機構及壓力洩壓閥。
- For short form, light weight, double rod rotary cylinder.
- Built-in safety check valves and pressure relief valves.
- 洩油孔配管務必單獨接回油壓槽，以避免產生背壓。
- The drain port should be independently connected to oil tank to avoid back pressure.



保留規格修改的權利
Subject to technical changes.

規格 Spec.	活塞面積 Eff. piston area cm ²				行程 mm Piston stroke	最高迴轉數 min ⁻¹ (r.p.m) Max. speed	最高使用壓力 MPa Max. pressure (kgf/cm ²)	I kg·m ² Moment of inertia	重量 kg Weight
	押側 A	Extend B	拉側 A	Retract B					
RD-120	122.7	126.1	116.1	113.1	20	5000	3.0(30)	0.14	11.3
RD-125					25			0.15	11.5

寸法 Size 型號 Model	A	B	C	D	E		F	
					max.	min.	max.	min.
RD-120	130	125	137	227	60	40	35	15
RD-125			147	237	55	30		10